TUFTING STITCH EMBROIDERY MACHINE SERIES

植绒刺绣机系列















产品应用

APPLICATIONS

平绣+植绒绣二合一混合绣花机是一款全自动转换植绒绣和平绣的特种绣花机。 把植绒绣和平绣两种工艺完美结合, 可适用于服装, 家纺, 工艺品等各种领域。


Mixed tuft embroidery combined is a special embroidery machine which can automatically transform tuft embroidery and normal embroidery . combined two kinds of embroidery craft in perfectly. applicable to all kinds of clothing , home textiles, handicrafts and other fields.

主要性能特征

MAIN PERFORMANCE CHARACTERISTICS

- **Q1** 根据花版和产品需求设计出长度不同的 3 维形状,使绣线挺立,凸显清晰图案。 According to the patterns and products, can create to have 3 dimensional designs via different yarns loop strands or cut strands reserved from the surface, flatness and straightness of each yarn show the vivid graphic.
- **02** 绣品柔中带刚,质感坚挺,手感柔软细腻,富有弹性,耐水洗,耐揉压。
 Tufting Stitch embroidery gives the felling of softness and exquisiteness but with rigidity, also flexible, wash-resistant and rub-resistant.
- **103** 新工艺加持,绣品牢固不脱落,通过绣线与面料结合,无限创意呈精美效果。 With new technology, tufting embroidery is provided with a matchless tightness and will not fall off. through the colorful thread and perfectly integration of each threads and fabric, designer idea can be expressed effectively with vivid graphic.
- **04** 每个机头独立的电机和电控来完成,机器结构简单大方,保证刺绣的精准度和稳定性。 each head is accomplished by an independent motor and electric control. Machine structure is simple and generous. To ensure that the accuracy and stable of embroidery.
- **05** 下轴机械传动无需凸轮和齿轮,机器噪音低,耐磨损,速度高,最高转速 1200 转 / 分钟。
 Without cam and gear in lower shaft mechanical driver. Low noise wear resistance and high speed maximum speed is up to 1200rpm.

▼ MF(12+9)(6+6) /600

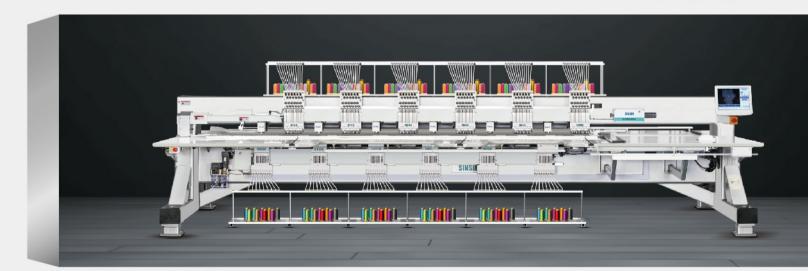

31 32